

**Performance F-PS130F**



**EXPERT  
PS 130F**



**2-way component kit**



• Flax cone  
Neutral sound without coloration  
More dynamique  
Natural reproduction

• Butyl surround  
Excellent reliability

• Compact crossover, prewired  
Easy to install

• Serial number engraved  
on the surround

• Aluminium basket  
Rigid and non-magnetic  
Design / Excursion

• Integrated terminal

• Tilted mounting  
Easier installation  
Soft Touch finishing

• Processed Aluminum/Magnesium inverted  
dome tweeter  
Smoothness and definition without directivity  
Poron suspension for long life

**WHAT MAKES THE DIFFERENCE**

- High sensitivity
- All the last high tech solutions
- Unique and patented FLAX cone (N°1350116)
- A new sound for a new 100% Focal signature

**TECHNICAL CHARACTERISTICS**

**Diameter:** 5" (130mm)  
**Voice-coil diameter:** 1" (25mm)  
**Voice-coil height:** 0<sup>3</sup>/<sub>8</sub>" (10mm)  
**Magnet:** 3<sup>1</sup>/<sub>3</sub>" (85mm)

**Processed Aluminum/Magnesium inverted dome tweeter**  
**Separate crossover:** 12-12dB/Oct  
**Ajustable tweeter level:** 0; -3dB/Oct  
**Max. power:** 120W

**Nom. power:** 60W  
**Sensitivity (2.83V/1m):** 91.6dB  
**Frequency response:** 75Hz - 28kHz  
**Accessories:** Supplied grilles


**Performance F-PS165F**



**EXPERT  
PS 165F**



**2-way component kit**

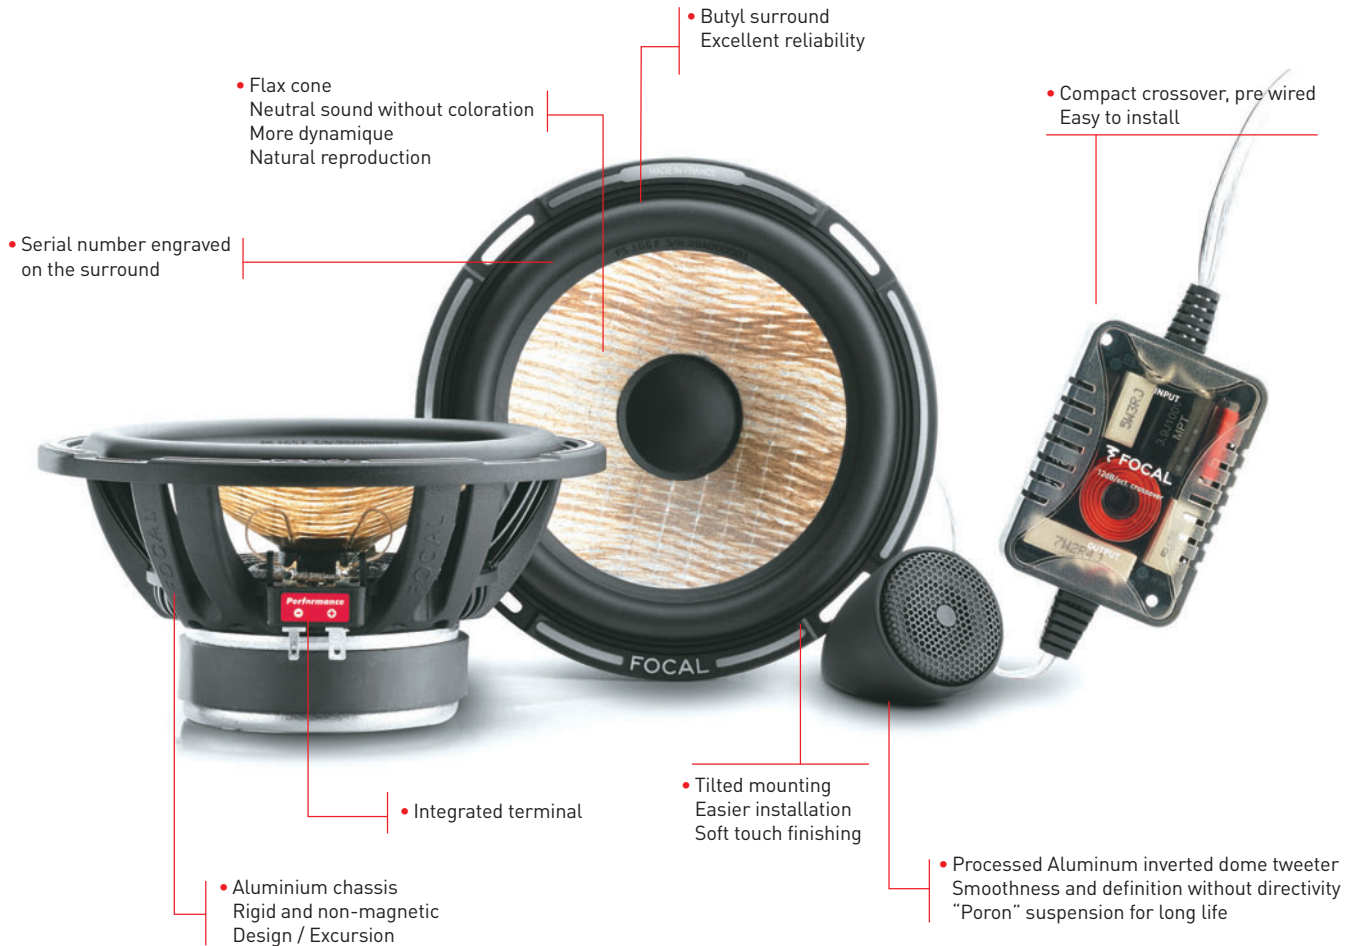

**WHAT MAKES THE DIFFERENCE**

- High sensibility
- All the last high technologies
- Unic and patented FLAX cone (N°1350116)
- A new sound for a new 100% Focal signature

**TECHNICAL CHARACTERISTICS**

**Diameter:** 6 1/2" (165mm)  
**Voice-coil diameter:** 0 3/8" (25mm)  
**Voice-coil height:** 0 9/16" (15mm)  
**Magnet:** 3 1/3" (85mm)

**Processed Aluminum/Magnesium inverted dome tweeter**  
**Separate crossover:** 12-12dB/Oct  
**Ajustable tweeter level:** 0;-3dB/Oct  
**Max. power:** 140W

**Nom. power:** 70W  
**Sensitivity (2.83V/1m):** 91.6dB  
**Frequency response:** 60Hz – 28kHz  
**Accessories:** Supplied grilles


**Performance F-PS165F3**



**EXPERT  
PS 165F3**



**3-way component kit**

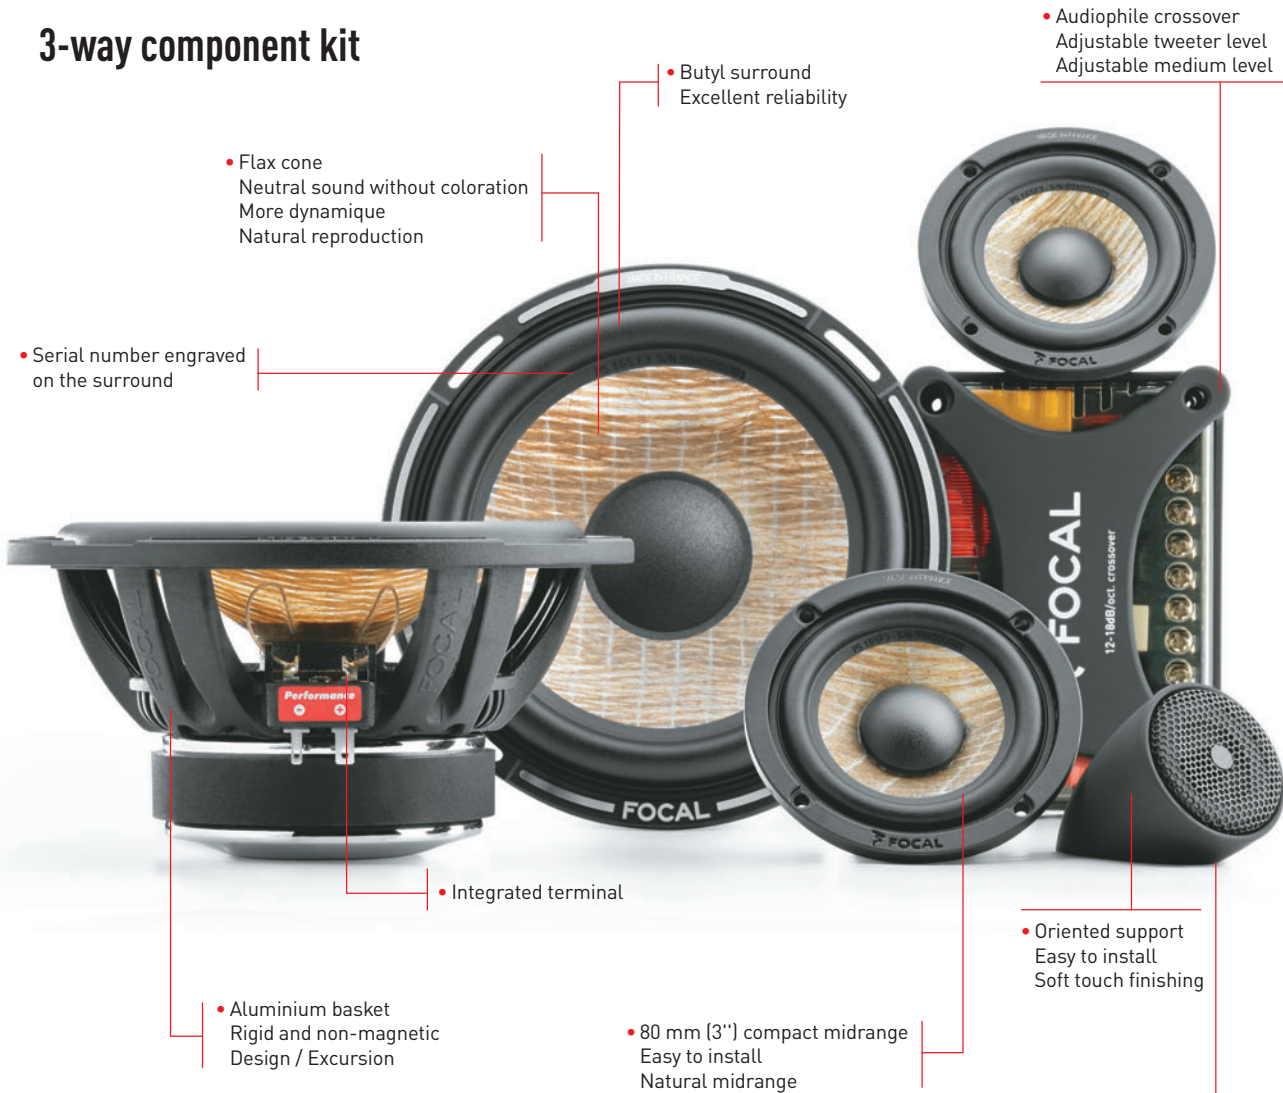

**WHAT MAKES THE DIFFERENCE**

- High power handling
- Very low deep bass
- Compact midrange
- Detailed sound stage
- Unique and patented FLAX cone (N°1350116)
- A new sound for a new 100% Focal signature

**TECHNICAL CHARACTERISTICS**

**Woofer diameter:** 6<sup>1</sup>/<sub>2</sub>" [165mm]  
**Midrange diameter:** 3" [80mm]  
**Woofer depth:** 3<sup>1</sup>/<sub>16</sub>" [77mm]  
**Midrange depth:** 1<sup>5</sup>/<sub>16</sub>" [33,5mm]  
**Woofer magnet:** 3<sup>9</sup>/<sub>16</sub>" [90mm]

**Processed Aluminum/Magnesium inverted dome tweeter**  
**Separate crossover:** 12-18dB/Oct  
**Ajustable Tweeter level:** 0;-3dB/Oct  
**Ajustable Medium:** HI-MID/Flat

**Max. power:** 160W  
**Nom. power:** 80W  
**Sensitivity [2.83V/1m]:** 91.5dB  
**Frequency response:** 55Hz – 28kHz  
**Accessories:** Supplied grilles



# EXPERT PS 165FX



## 2 way component kit



## WHAT MAKES THE DIFFERENCE

- High power handling
- Very low deep bass
- All the last high technologies
- BI AMP system (special crossover)
- Unic and patented FLAX cone (N°1350116)
- A new sound for a new 100% Focal signature

## TECHNICAL CHARACTERISTICS

**Diameter:** 6 1/2" (165mm)  
**Voice-coil diameter:** 1 1/4" (32mm)  
**Voice-coil height:** 0 9/16" (15mm)  
**Magnet:** 3 3/16" (90mm)

**Processed Aluminum/Magnesium inverted dome tweeter**  
**Separate crossover:** 12-18dB/Oct  
**Adjustable tweeter level:** 0;-3dB/Oct  
**Max. power:** 160W

**Nom. power:** 80W  
**Sensitivity (2.83V/1m):** 91.3dB  
**Frequency response:** 55Hz - 28kHz  
**Accessories:** Supplied grilles